

# CDX1-1425



- **25Wrms continuous power handling (AES standard) and 108dB sensitivity**
- **Lightweight and compact compression driver featuring neodymium magnet**
- **Features lightweight neodymium magnet**
- **Finite Element Analysis (FEA) used to optimise both magnet and acoustic design**
- **Suitable for 2-way and 3-way systems**

## General Specifications

Power rating (AES, W rms) .....	25
Nominal impedance ( $\Omega$ ) .....	8
Frequency range (Hz).....	2000-20000
Sensitivity (dB) .....	108
Minimum crossover (Hz) .....	2500
Voice coil diameter (mm/in) .....	35.6/1.4
Diaphragm material .....	Aluminium
Magnet material .....	Neodymium


## Mounting Information

Width (mm/in) .....	90/3.5
Depth (mm/in) .....	58/2.3
Weight (kg/lb) .....	0.39/0.9
Fitting .....	Flange (2 M6 holes on 76mm, 3.0in PCD)
Throat exit (mm/in) .....	25.4/1

## Packed Dimensions & Weight

Single pack size W x D x H (mm/in) .....	90 x 90 x 60
.....	/3.5 x 3.5 x 2.4
Single pack weight (kg/lb) .....	0.5/1.1
Multi pack (24) size W x D x H (mm/in) .....	250 x 350 x 290
.....	/9.8 x 13.8 x 11.4
Multi pack (24) weight (kg/lb) .....	10/22

## Frequency Response

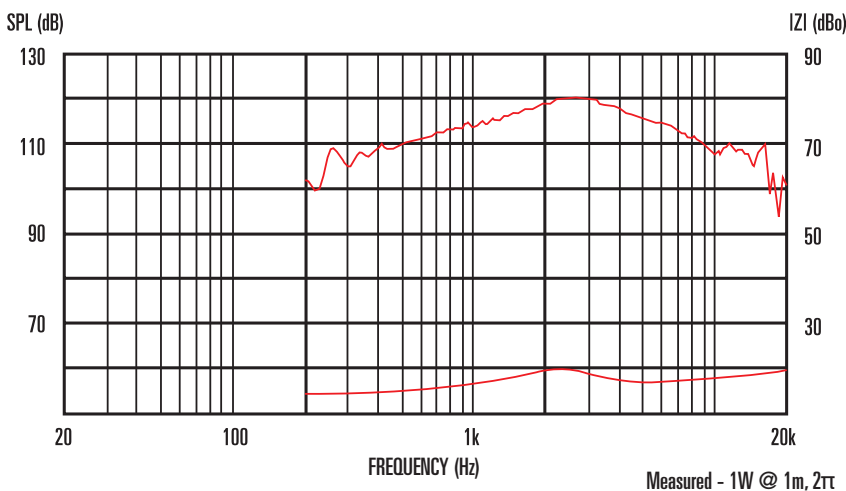

**CELESTION**

Professional Loudspeakers

Your Global Driver Solutions Partner